


# FiiO

## 快速入门指南 Quick Start Guide

Model : BTR3

## Buttons and Ports Labeled/ Operation Explained

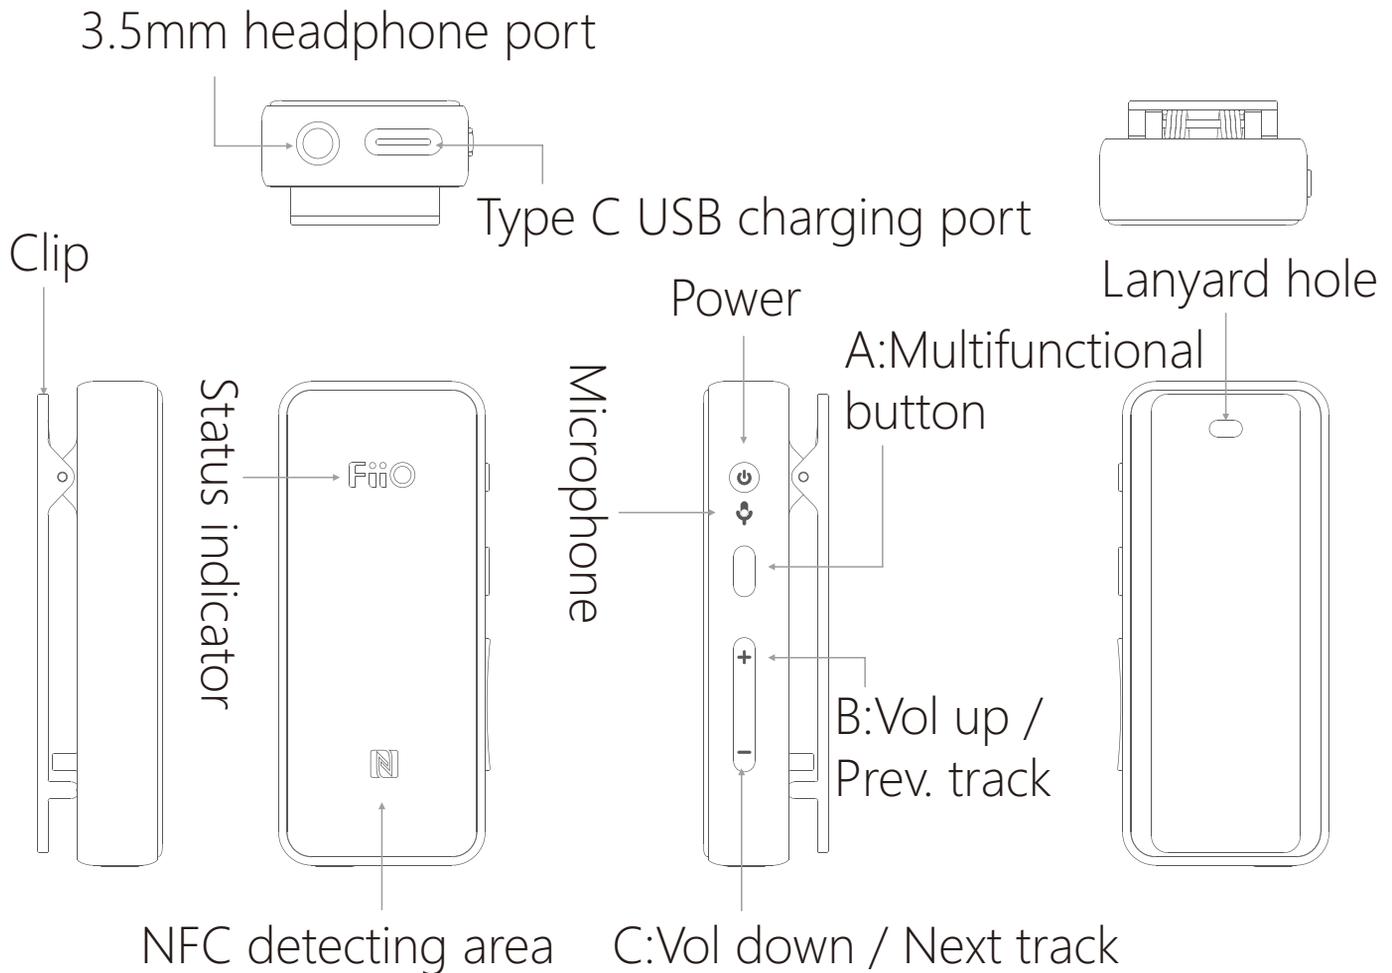

## Functions & Operations

- **Power on/off:** Hold the Power button for about 3 seconds until the blue light flashes for three times, and the device will then power on/off.
- **Reset:** Hold the Power button for about 10 seconds at any time.
- **USB DAC mode:** can be switched to Manual / Auto mode via the App.

Auto mode: connect it to the computer and then select it as the audio output device to play music; the white light will stay steadily on;

Manual mode: connect it to the computer and then click the power button for 3 times; the white light will stay steadily on.

•**Firmware upgrade:** Please go to <https://www.fiio.com/supports> to get the detailed instruction.

•**Enter pairing mode**

1. After powered on for the first time: the device would automatically enter the pairing mode, and the red and blue lights will flash alternately.

2. Force the device to enter Pairing mode: Hold the button A for about 5 seconds when the device is on, and the red and blue lights will flash alternately.

3. Clear current pairing: Hold the button B and C at the same time for about 5 seconds when the device is on.

4. The BTR3 supports connecting with two devices at the same time.

•**Enter reconnecting mode**

1. After disconnection, the blue light will flash twice every two seconds; click the button A to reconnect.

2. After the device restarted, it will reconnect to the last connected device automatically.

## •Operation instruction after a successful pairing:

Play/Pause/Answer phone call/End calling/Cancel a call:  
Click button A.

Reject phone call: Hold the button A for about 2 seconds when there's an incoming call.

Volume up/down: Click button B/C turn up/down the volume.

Switch songs: Hold the button B/C about 2 seconds to switch to the previous/next song.

Switch between input devices: can be switched to Manual / Auto mode via the App when paired with two devices via Bluetooth.

Auto mode: it's required to pause one device and start the other manually;

Manual mode: double click the power button to switch between the devices.

Activate Siri: Double click the button A.

## •One-touch NFC pairing:

When the BTR3 is on and the Android device is unlocked with NFC enabled, get the two devices touched by the NFC detecting area to start the pairing.

## Indicator Display

### 1. Status indicator display (when not playing)

Status	Blue light	Red light
1. Low battery warning	Off	Indicates the current working status

2. Device connected	Flashes once every 3 seconds	Off
3. Charging	Indicates the current working status	
4. Charging completed		

## 2. Indicator display of different input codecs (when playing)

Codec	In normal state	Low battery warning	Charging
SBC	Blue light pulsates	Red light indicates the current working status	Codec indicator stays steadily on
AAC	Cyanic light pulsates		
aptX、aptX LL	Purple light pulsates		
aptX HD	Yellow light pulsates		
LDAC	White light pulsates		
LHDC	Green light pulsates		

## Notification Sounds

There will be notification sounds under the following status: Power on, power off, pair, connect, clear pairing history, Max. volume, low battery warning and pairing disconnected.

## Notes and Precautions

- ★It's recommended to charge the device using a standard 5V charger.
- ★Please don't place the device in circumstance of excessive high/low temperature (above 45°C or below 0°C)
- ★Please keep the device away from liquids to avoid any damage to it.
- ★If the device is to be left unused for a long time, please recharge it periodically to preserve its battery life.
- ★Please adjust the volume to a suitable level before putting on the earphones to protect your hearing.
- ★Please do not disassemble, damage the battery, or drop it into fire; it's prohibited to continue using after the battery is soaked in water.

## List of Items Included

- |                 |                     |
|-----------------|---------------------|
| BTR3*1          | Type C USB cable*1  |
| Lanyard*1       | Quick start guide*1 |
| Warranty card*1 |                     |

## Learn More

To learn more about the product, please visit our website: [www.fiio.com](http://www.fiio.com).

## WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

### Internal/Supplied Batteries

This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate collection point.

Qualcomm aptX is a product of Qualcomm Technologies, Inc. and/or its subsidiaries.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries.

aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries.

LDAC and LDAC logo are trademarks of Sony Corporation.



Qualcomm® aptX™ HD